



# 5-Point Rotary Automatic

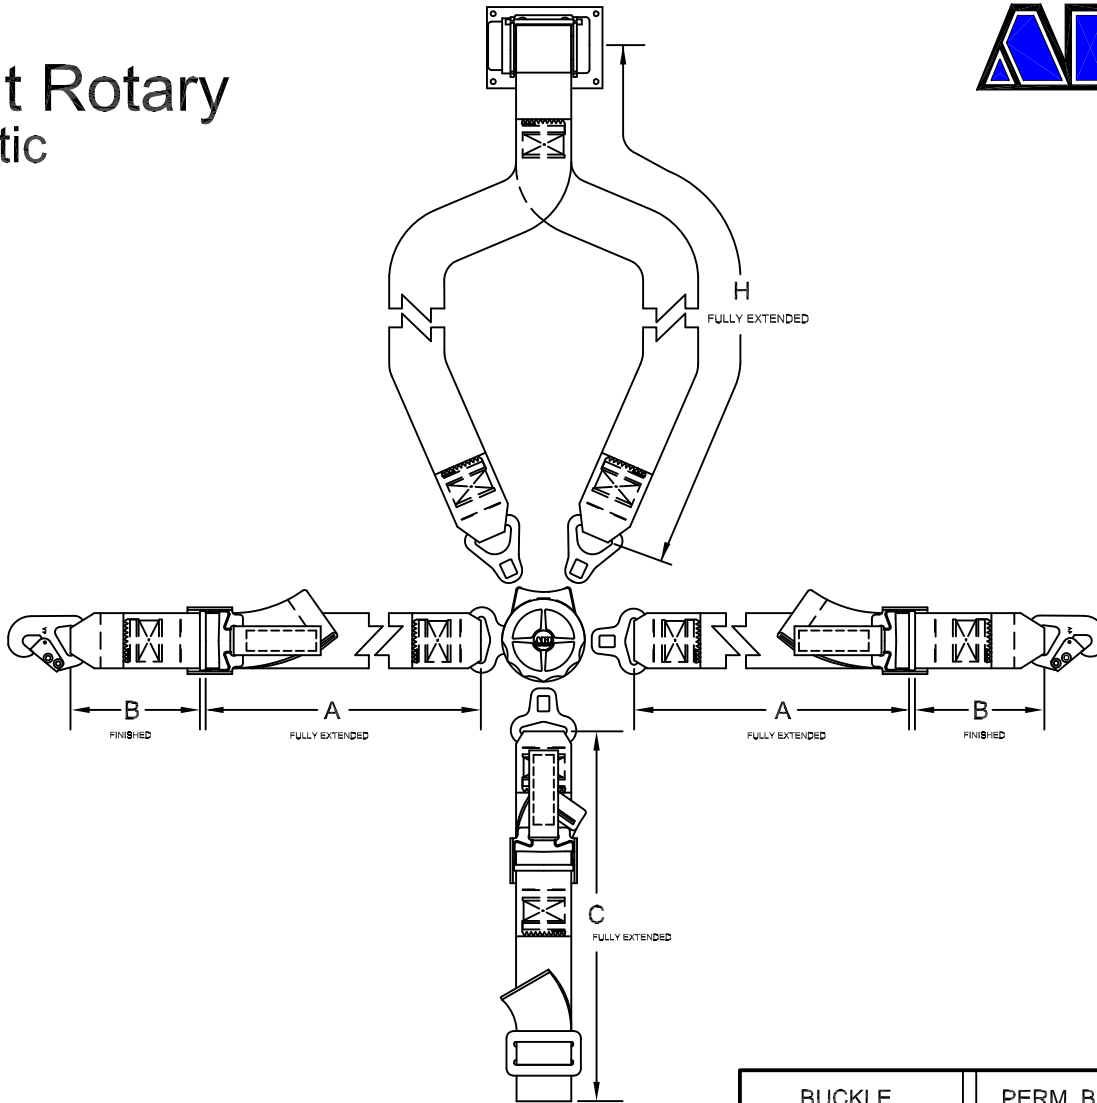

## PART NO. SYSTEM

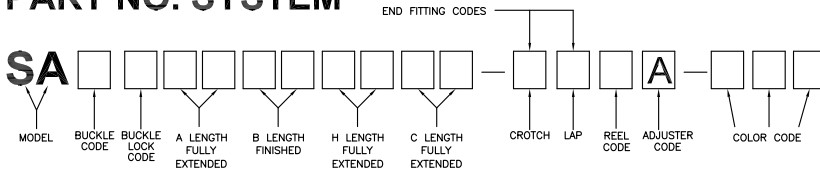

## SAMPLE PART SAKB26304612-BEEA-601

The cam lock rotary is available in a 5-point or 4-point configuration. Dual shoulder harness attachments and an optional anti-sub or crotch strap ensure a proper fit for your requirements. Please check the reel selection page in this section to find proper reel for your application.

**Aircraft Belts, Inc.**  
**1176 Telecom Drive**  
**Creedmoor, NC 27522**  
**Phone: 800.847.5651**  
**Fax: 919.956.4220**  
**[www.aircraftbelts.com](http://www.aircraftbelts.com)**

BUCKLE CODES		PERM. BUCKLE ATTACHMENT	
CODE	P/N	CODE	DESCRIPTION
A	SL 10	B	LEFT
C	SL 11	C	RIGHT
K	ABI-K		

ENDFITTINGS		
4A	4B	4C
4D	4E	4G

ENDFITTING CODES					
CODE	P/N	BOLT HOLE	CODE	P/N	BOLT HOLE
A	4A	.375 HOOK	D	4D	.386 HOLE
B	4B	.250 HOLE	E	4E	.406 HOLE
C	4C	.325 HOLE	G	4G	.386 HOLE

- Notes:
1. Complete assembly conforms to FAA TSO C114.
  2. Identification labels affixed to each portion of the assembly.
  3. Lap assembly rated to 3000 lbs. Harness assembly rated to 2500 lbs.
  4. Rotary buckle is black polycarbonate, but an aluminum version is available for custom plating.